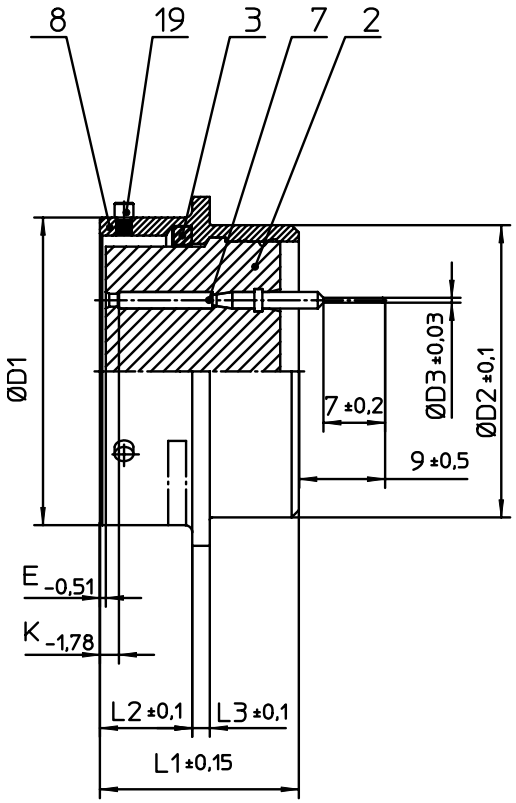


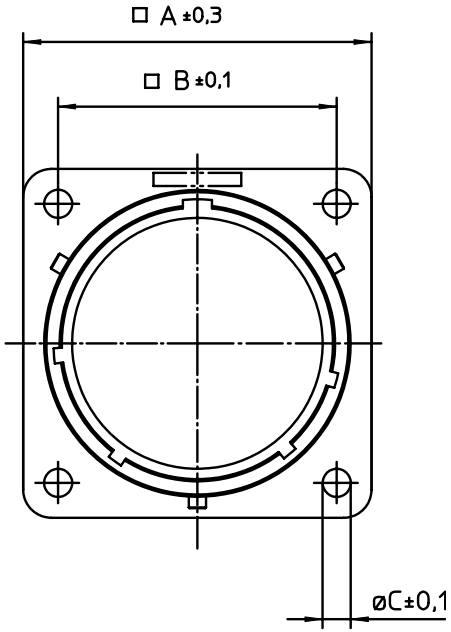


| NO. | MASSE / DIMENSIO |
|---|---|
| A | 30.9 |
| B | 24.6 |
| C | 3.2 |
| D1 | 25.4 |
| D2 | 23.7 |
| D3 | 0.6 |
| E | 0.46 |
| K | 3.89 |
| L1 | 21.1 |
| L2 | 11.6 |
| L3 | 1.9 |

| NO. | BESCHREIBUNG / DESCRIPTION |
|---|---|
| 2 | ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET |
| 3 | DICHTRING / GASKET |
| 7 | KONTAKT BUCHSE / CONTACT SOCKET |
| 8 | GEHÄUSE / RECEPTACLE |
| 19 | BAYONETTSTIFT / BAYONET PIN |




Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to chang
Drawings illustrate normal insulator positioning

| Material Specification: | |
|---|---|
| Shell Material: | Aluminium alloy |
| Shell Plating: | Olive drab chromate over cadmium plating |
| Insulator Material: | Polychloroprene |
| Contact Material: | Copper alloy, gold plated |
| Contact Plating: | Copper alloy, gold plated |

all dimensions are in mm
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for
CUSTOMER

ITT
Engineered for life
ITT CANNON GmbH
D - 71384 Weinstadt/Germany

description KPT02E1626SWEW
Box mounting receptacle

Solder Pin 0.6 x 7 mm / Socket / Layout: 16-26

© All rights reserved. Reproduction or issue to third in any form whatever is only permitted with written authorization of ITT Cannon