


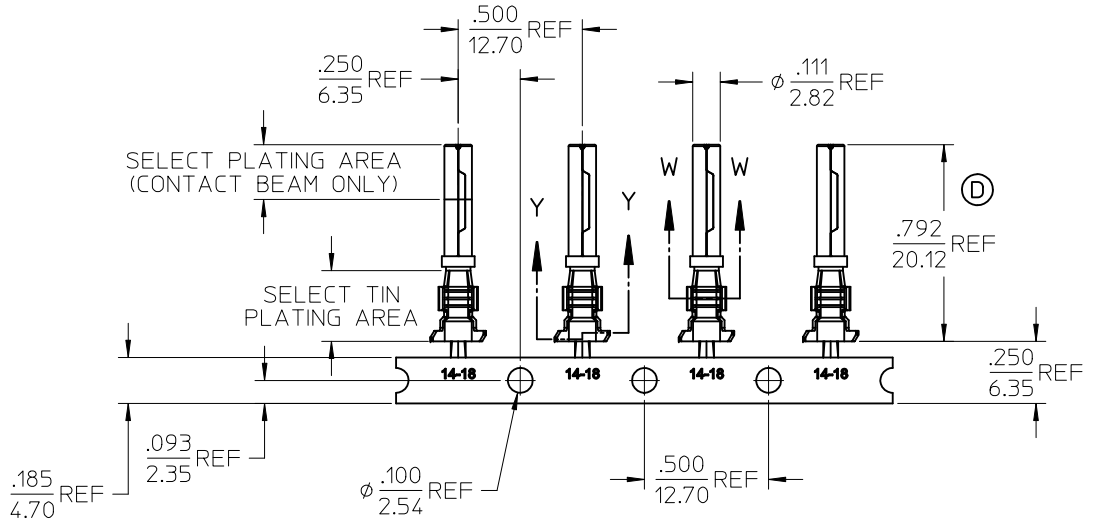


STRIP MATERIAL NUMBER	FINISH
84525-0025	SELECTIVE TIN 100μ INCH MINIMUM OVER NICKEL 80μ INCH MINIMUM OVERALL
84525-0046	SELECTIVE HARD GOLD 30μ INCH MINIMUM WITH SELECTIVE TIN 100μ INCH MINIMUM OVER NICKEL 50μ INCH MINIMUM OVERALL

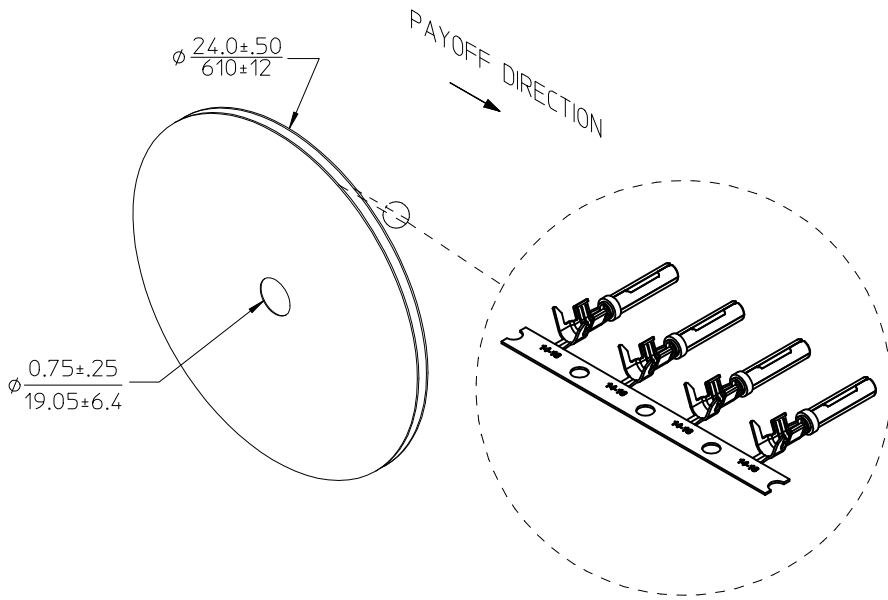

Section Y-Y
Scale 5:1
INSULATION CRIMP



Section W-W
Scale 5:1
CONDUCTOR CRIMP

WIRE INSULATION O.D. RANGE $\frac{.095-.150}{2.41-3.81}$

NOTES:

1. TERMINAL MATERIAL: COPPER ALLOY, .0118/0.300 THICK. FINISH: SEE CHART.
2. HOOD MATERIAL: STAINLESS STEEL, .006/0.15 THICK.
3. STRIP PARTS ARE REELED 3000 PARTS PER REEL AS SHOWN ABOVE.
4. TERMINAL FOR USE WITH SERIES XRC CONNECTOR ASSEMBLIES.
5. ALL MATERIALS AND FINISHES ARE ROHS COMPLIANT.

UPDATE LENGTH EC NO: PG2012-0063 D/DRINKWLEUNG 2011/12/06 CHKD: JHKK APPR: JTTITUS 2012/01/09	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± .005 2 PLACES ± .13 ± --- 1 PLACE ± --- ± --- ANGULAR ± ---°	DIMENSION STYLE IN/MM DRAWN BY DATE MODELL 2009/04/09 CHECKED BY DATE RDEROSS 2009/04/09 APPROVED BY DATE DTITUS 2010/12/06	SCALE 2:1 DESIGN UNITS INCH THIRD ANGLE PROJECTION	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO. SEE CHART SIZE B THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	TITLE XRC SOCKET W/SNAP WINDOW 14-18AWG .095"-.150" WIRE DIA MOLEX MOLEX INCORPORATED DOCUMENT NO. SD-84525-007 SHEET NO. 1 OF 1