



REV.	DESCRIPTION	DATE
A	NEW DRAWING	7/30/2007
B	added pin dimension	6/11/2008



SCALE: 3:1

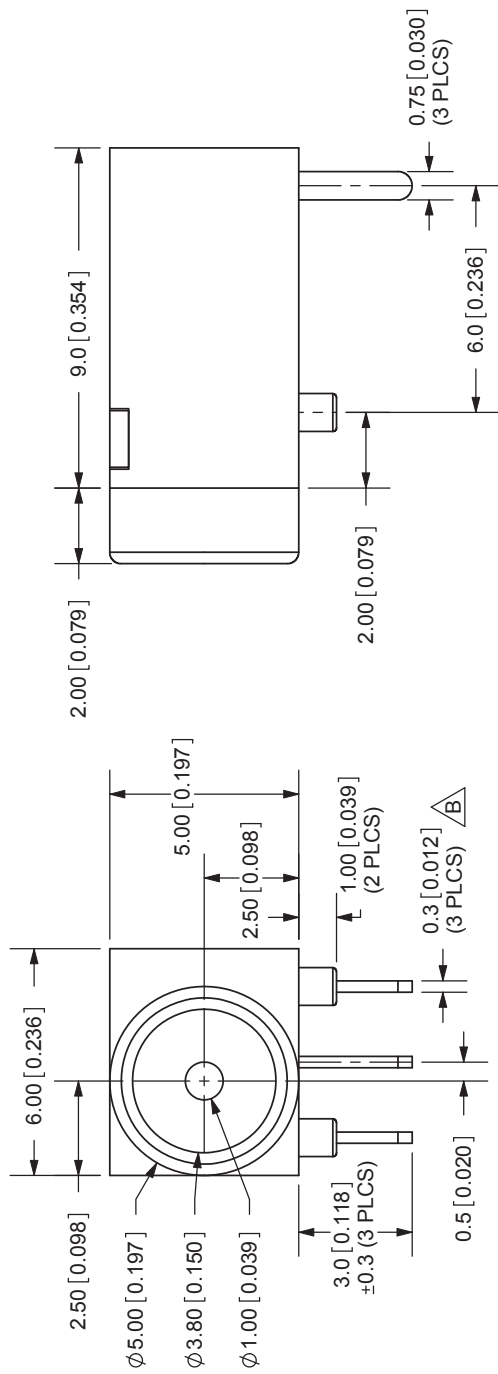

TOLERANCE:  
 X.X $\pm$ 0.2mm  
 X.XX $\pm$ 0.1mm  
 X.XXX $\pm$ 0.05mm

**CUI INC**

20050 SW 112th Ave.  
 Tualatin, OR 97062  
 Phone: 503-612-2300  
 800-275-4899  
 Fax: 503-612-2383  
 Website: www.cui.com

REV: **B**

TITLE: DC POWER JACK

PART NO: PJ-040CH

UNITS: MM [INCHES]

APPROVED BY: ZRJ

SCALE: 5:1

**SPECIFICATIONS:**  
 RATING: 16V DC @ 3.5A  
 CONTACT RESISTANCE: 50m OHMS MAX  
 INSULATION RESISTANCE: 100M OHMS MIN: 500V DC  
 VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE  
 LIFE: 5,000 CYCLES  
 OPERATING TEMP: -25° ~ +85°C

CENTER PIN	MATERIAL	PLATING
TERMINAL 1	Brass	Silver
TERMINAL 2	Brass	Silver
TERMINAL 3	Copper Alloy	Silver
BODY	Brass	Silver
	PA66	

