


Ceramic Type Polyacene Capacitor

PAS3225P2R6143

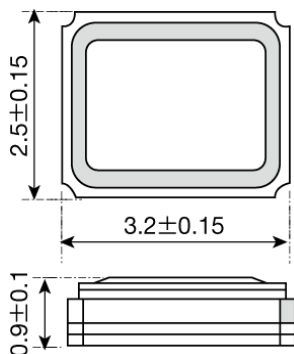

■ Features

- Item Summary
2.6V, 5 μ Ah(Measured between 2.6V-1.4V), 0.014F, 80 Ω
- Lifecycle Stage
Mass Production
- Standard packaging quantity (minimum)
Tape&Reel 10000pcs

■ Products characteristics table

Temperature Range	-30 to +70°C
Maximum Usable Voltage	2.6V
Nominal Capacity	5 μ Ah(Measured between 2.6V-1.4V) 0.014F
Internal Resistance	80 Ω
Initial Capacitance	- More than 0.0105F
Initial Internal Resistance	Less than 80 Ω
RoHS Compliance	Yes
Halogen Free	Yes
Soldering Method	Reflow

2013.08.20

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.
 TAIYO YUDEN reserves the right to make change to the Date at any time without notice.
 Before making final selection, please check product specification.