

Chip Beads(SMD) For Signal Line

Conformity to RoHS Directive

MMZ Series MMZ1005 Type

FEATURES

- Size standardized for use by automatic assembly equipment. No preferred orientation.
- Electroplated terminal electrodes accommodate reflow soldering.
- High reliability due to an entirely monolithic structure.
- Closed magnetic circuit structure allows high-density installation while preventing crosstalk between circuits.
- Low DC resistance structure of electrode prevents wasteful electric power consumption.
- It is a product conforming to RoHS directive.

APPLICATIONS

Removal of signal line noises of cellular phones, PCs, note PCs, TVs, TV tuners, STBs, audio players, DVDs, DSCs, DVCs, game machines, digital photo frames, car navigation system, PNDs, etc.

PRODUCT IDENTIFICATION

| | | | | | |
|-----|------|-----|-----|-----|-----|
| MMZ | 1005 | S | 121 | C | T |
| (1) | (2) | (3) | (4) | (5) | (6) |

- (1) Series name
 (2) Dimensions L×W
 (3) Material code
 (4) Nominal impedance
 121:120Ω at 100MHz
 (5) Characteristic type
 (6) Packaging style
 T:Taping

HANDLING AND PRECAUTIONS

- Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and product temperature does not exceed 150°C.
- After mounting components onto the printed circuit board, do not apply stress through board bending or mishandling.
- Do not expose the inductors to stray magnetic fields.
- Avoid static electricity discharge during handling.
- When hand soldering, apply the soldering iron to the printed circuit board only. Temperature of the iron tip should not exceed 350°C. Soldering time should not exceed 3 seconds.

MATERIAL CHARACTERISTICS

B material: This type is perfectly suited for fast digital signals. By equalizing R components and X components that beads possess at a frequency of 5MHz, it is able to suppress overshooting, undershooting and ringing of fast digital signals.


S material: Standard type that features impedance characteristics similar to those of a typical ferrite core. For signal line applications in which the blocking region is near 100MHz. Impedance values selected for effectiveness at 40 to 300MHz.

Y material: High frequency range type intended for the 100MHz region and above. For signal line applications in which the signal frequency is far from the cutoff frequency. Impedance values selected for effectiveness at 80 to 400MHz.

D material: For applications calling for low insertion loss at low frequencies and sharply increasing impedance at high frequencies. Designed for high impedance at high frequencies (300MHz to 1GHz) for signal line applications.

F material: This new product inherits the characteristic of our D-material, namely its sharp impedance rise time, and its impedance peak frequency has been shifted higher into range. The product offers excellent noise suppression from 600MHz to as high as in the GHz range.

TYPICAL MATERIAL CHARACTERISTICS

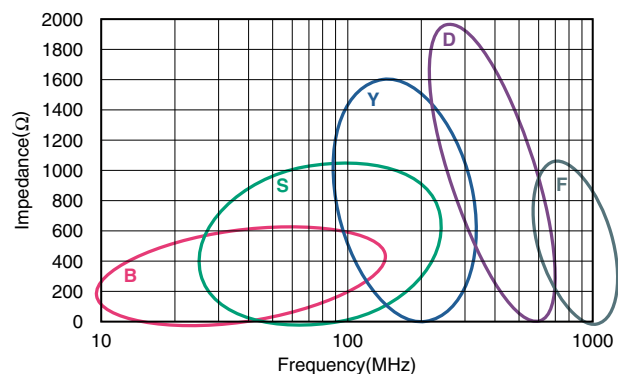


• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• Please contact our Sales office when your application are considered the following:
 The device's failure or malfunction may directly endanger human life (e.g. application for automobile/aircraft/medical/nuclear power devices, etc.)

• All specifications are subject to change without notice.

SHAPES AND DIMENSIONS/RECOMMENDED PC BOARD PATTERN

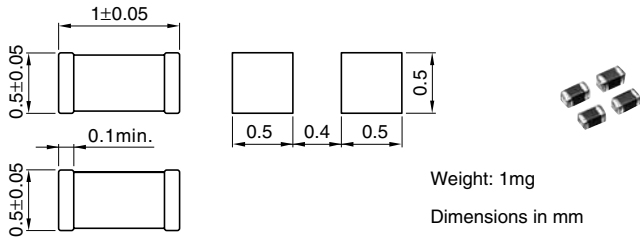


TEMPERATURE RANGES

| | |
|-------------------|---------------|
| Operating/storage | -55 to +125°C |
|-------------------|---------------|

PACKAGING STYLE AND QUANTITIES

| | |
|-----------------|-------------------|
| Packaging style | Quantity |
| Taping | 10000 pieces/reel |

RECOMMENDED SOLDERING CONDITION REFLOW SOLDERING

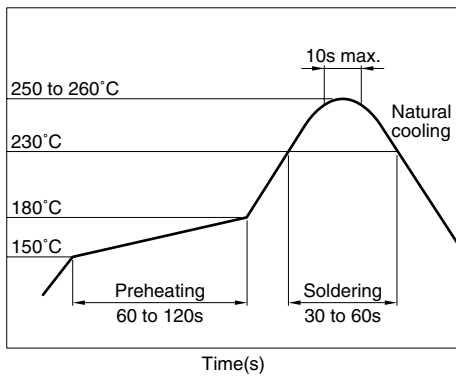


ELECTRICAL CHARACTERISTICS

| Part No. | Impedance (Ω)[100MHz]* | DC resistance (Ω)max. | Rated current (mA)max. |
|--------------|------------------------|-----------------------|------------------------|
| MMZ1005B800C | 80±25% | 0.20 | 450 |
| MMZ1005B121C | 120±25% | 0.25 | 400 |
| MMZ1005B601C | 600±25% | 0.85 | 200 |
| MMZ1005S800C | 80±25% | 0.20 | 500 |
| MMZ1005S121C | 120±25% | 0.25 | 500 |
| MMZ1005S241C | 240±25% | 0.40 | 400 |
| MMZ1005S601C | 600±25% | 0.60 | 300 |
| MMZ1005S102C | 1000±25% | 1.00 | 200 |
| MMZ1005Y400C | 40±25% | 0.12 | 550 |
| MMZ1005Y800C | 80±25% | 0.17 | 450 |
| MMZ1005Y121C | 120±25% | 0.21 | 400 |
| MMZ1005Y241C | 240±25% | 0.33 | 300 |
| MMZ1005Y301C | 300±25% | 0.38 | 250 |
| MMZ1005Y471C | 470±25% | 0.50 | 250 |
| MMZ1005Y601C | 600±25% | 0.56 | 250 |
| MMZ1005Y102C | 1000±25% | 0.74 | 200 |
| MMZ1005Y152C | 1500±25% | 1.15 | 100 |
| MMZ1005A152E | 1500±25% | 0.10 | 100 |
| MMZ1005D100C | 10±5Ω | 0.20 | 500 |
| MMZ1005D220C | 22±25% | 0.35 | 400 |
| MMZ1005D330C | 33±25% | 0.55 | 400 |
| MMZ1005D680C | 68±25% | 0.75 | 400 |
| MMZ1005D121C | 120±25% | 1.20 | 350 |
| MMZ1005D241C | 240±25% | 0.60 | 200 |
| MMZ1005F330C | 33±25% | 0.80 | 200 |
| MMZ1005F470C | 47±25% | 0.80 | 100 |
| MMZ1005F560C | 56±25% | 0.20 | 100 |


* Test equipment: E4991A or equivalent
Test tool: 16192A or equivalent
Test temperature: 25±10°C

TYPICAL ELECTRICAL CHARACTERISTICS Z, X, R vs. FREQUENCY CHARACTERISTICS


MMZ1005B800C

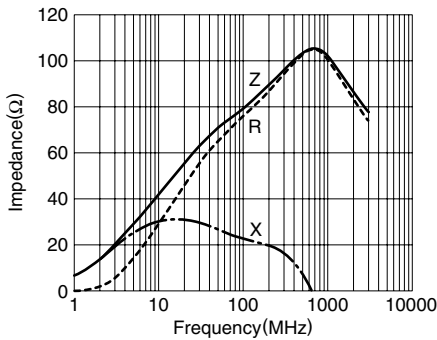


MMZ1005B121C

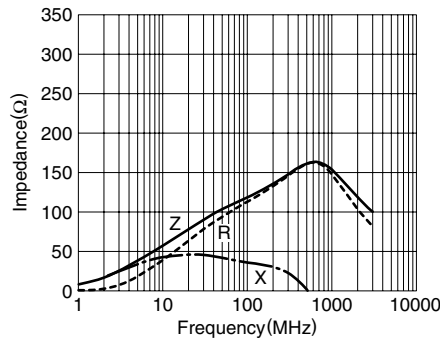


MMZ1005B601C

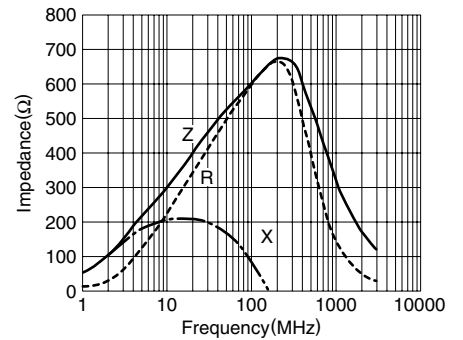


MMZ1005S800C

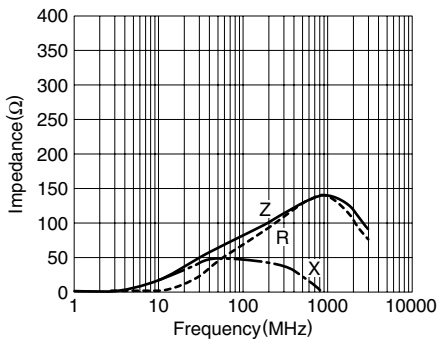

MMZ1005S121C

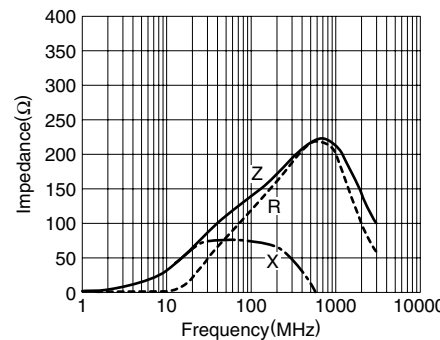


MMZ1005S241C

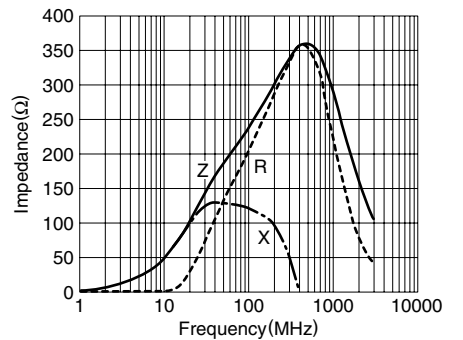


• All specifications are subject to change without notice.


TYPICAL ELECTRICAL CHARACTERISTICS
Z, X, R vs. FREQUENCY CHARACTERISTICS
MMZ1005S601C

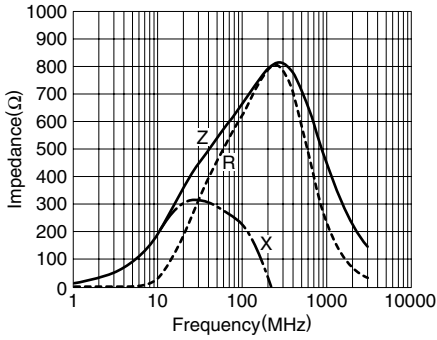


MMZ1005S102C

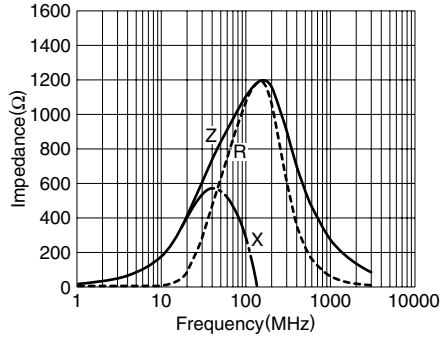


MMZ1005Y400C

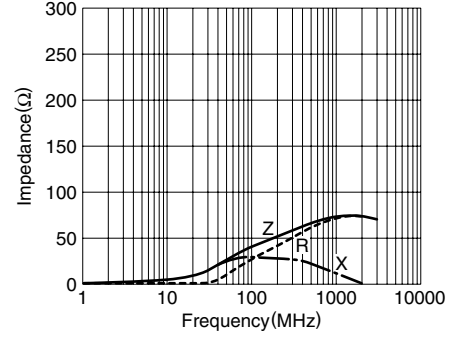


MMZ1005Y800C

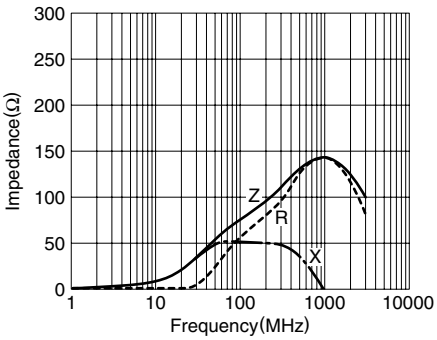


MMZ1005Y121C

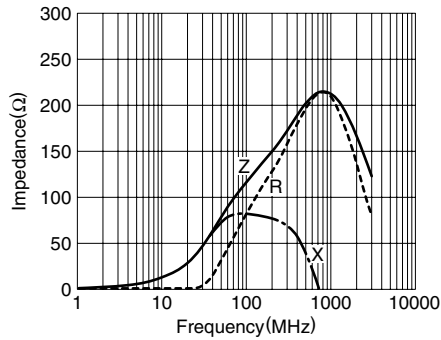


MMZ1005Y241C

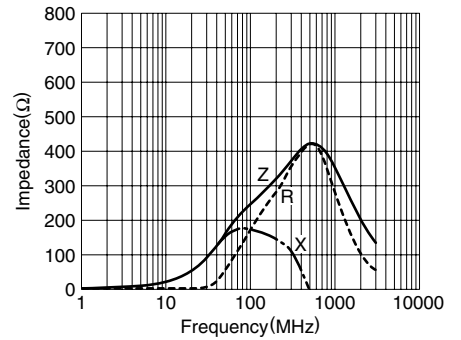


MMZ1005Y301C

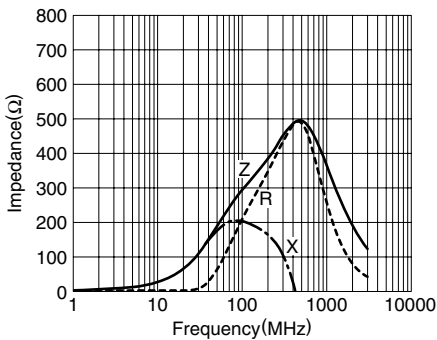


MMZ1005Y471C

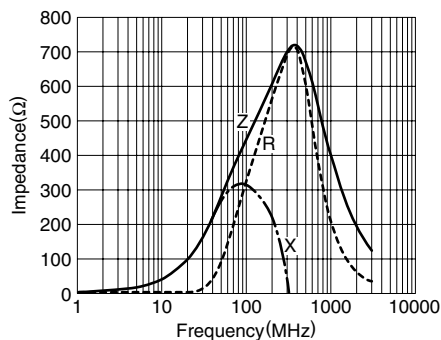


MMZ1005Y601C

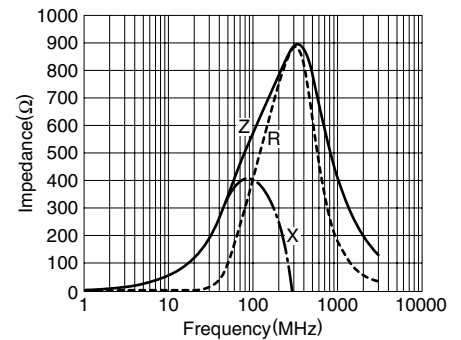


MMZ1005Y102C

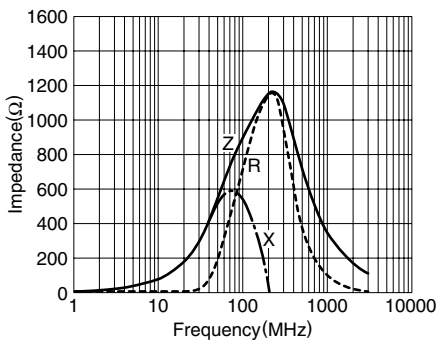

MMZ1005Y152C

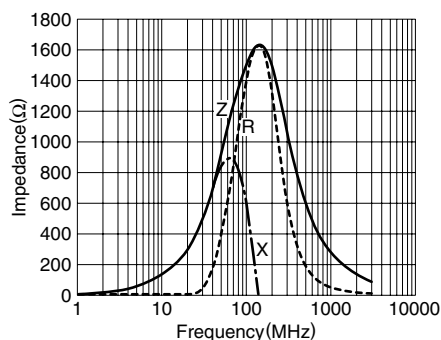


MMZ1005D100C

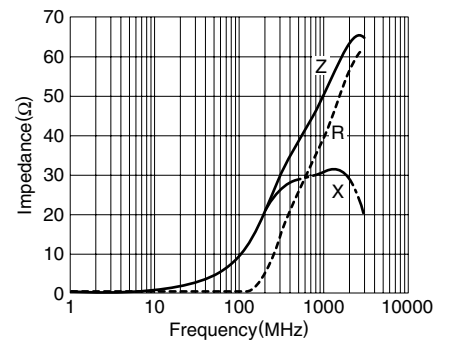


• All specifications are subject to change without notice.


TYPICAL ELECTRICAL CHARACTERISTICS
Z, X, R vs. FREQUENCY CHARACTERISTICS
MMZ1005D220C

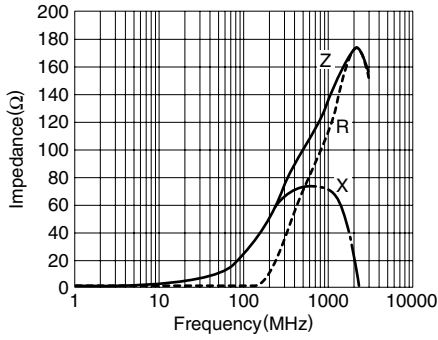


MMZ1005D330C

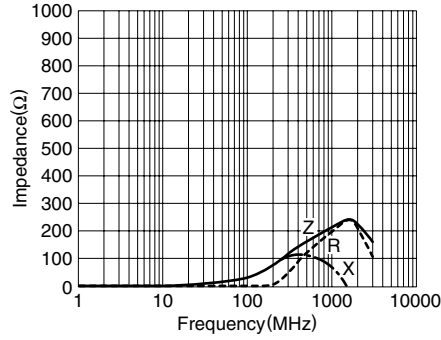


MMZ1005D680C

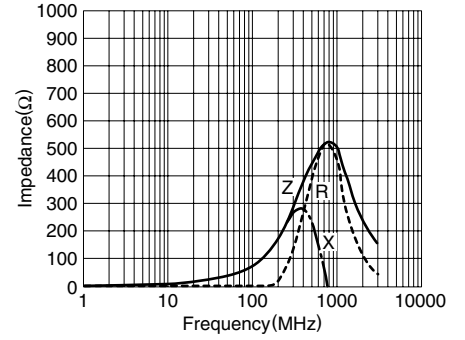


MMZ1005D121C

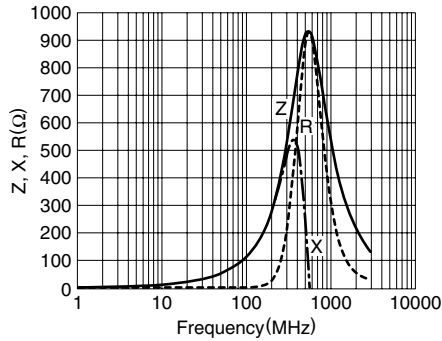


MMZ1005D241C

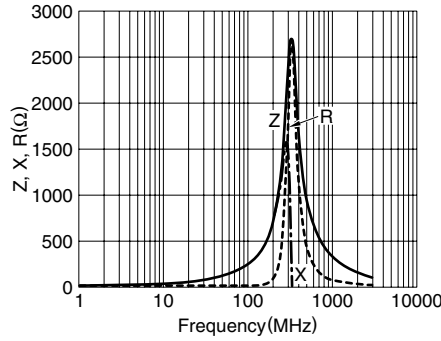


MMZ1005F330C

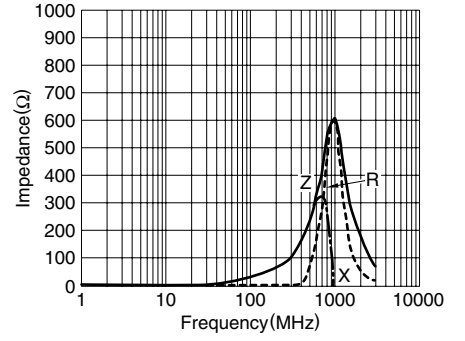


MMZ1005F470C

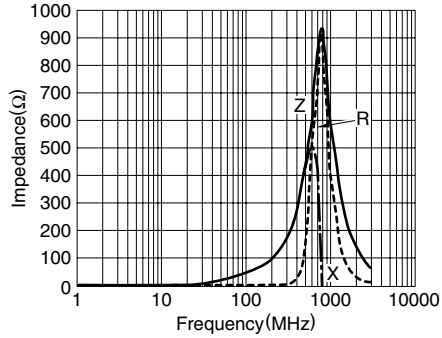

MMZ1005F560C

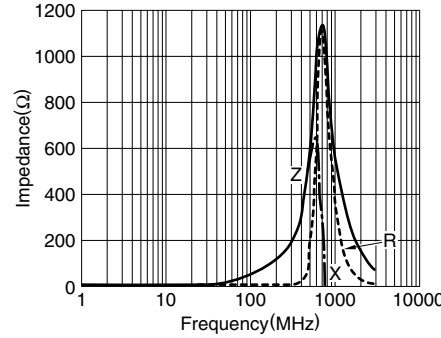


PACKAGING STYLES
REEL DIMENSIONS

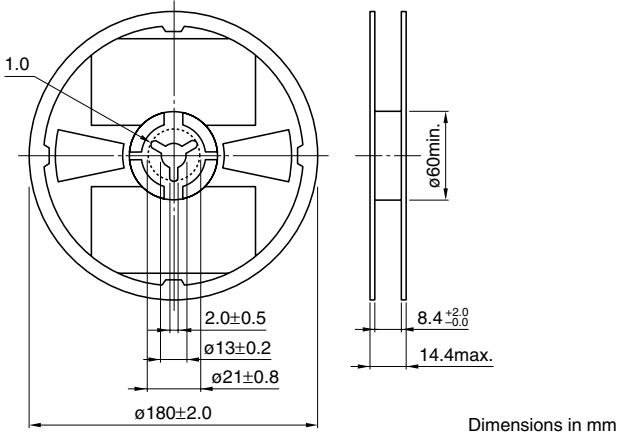

Dimensions in mm

TAPE DIMENSIONS

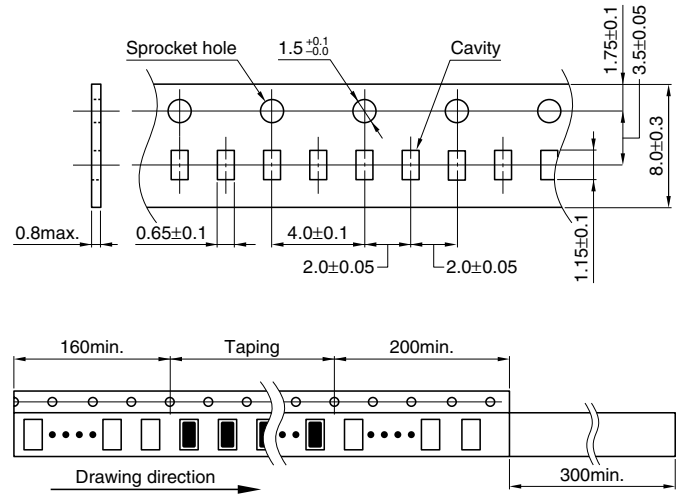

Dimensions in mm

• All specifications are subject to change without notice.