

Caps Fingergrip for Holder FEU, FAU, FAC



250 VAC · 20 A (UL/CSA)



Standards

- IEC 60127-6
- UL 4248-1 / UL 512
- CSA C22.2 no. 39

References

Mating Cap to [FAC](#); [FAU](#); [FEU](#)


Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

| | |
|------------------------------|------------------------------|
| Fuse-Link | 5 x 20 or 6.3 x 32 mm |
| Rated Voltage | 250 VAC |
| Rated current | 10 A (VDE), 20 A (UL/CSA) |
| Degree of Protection | IP 40 |
| Admissible Ambient Air Temp. | -40 °C to 85 °C |
| Material: Cap | Thermoset |
| Storage Conditions | 0 °C to 60 °C, max. 70% r.h. |

Dimension

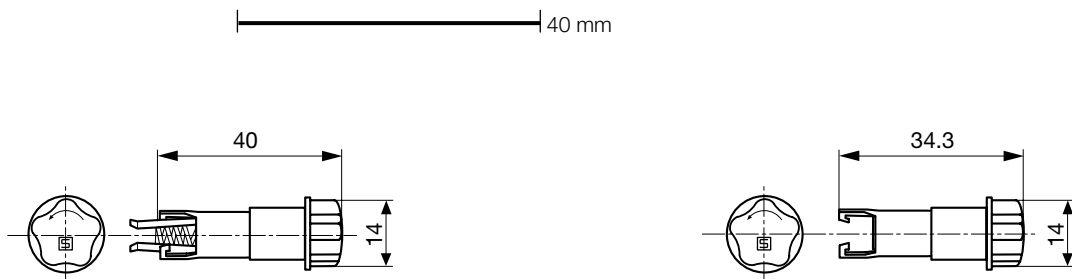

All Variants

| Cap | Fuse-Link | Degree of Protection | Order Number |
|------------|------------|----------------------|--------------|
| Fingergrip | 6.3 x 32mm | IP 40 | 0031.1667 |
| Fingergrip | 5 x 20mm | IP 40 | 0031.1741 |

Most Popular.

Availability for all products can be searched real-time: <http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging Unit

Plastic Bag (100 pcs.)