LED Orange, 5mm







Features:

Built-in IC chip, flashes lamp on and off to attract attention

Operating voltage range : 3V to 10V DC

1/4 duty cycle

• Blinking frequency : 2.4Hz (Vdd = 5V)

• Frequency tolerance : 20%

Specifications:

Dice material : GaAsP on GaP
Emitted colour : Orange Red
Lens colour : Orange Diffused

Peak wavelength : 635nm Viewing angle : 45° Luminous intensity (IV) : 9.8mcd

Absolute Maximum Ratings (T_a = 25°C)

Parameter	Maximum	Unit	
Continuous Forward Current	30	mA	
Derating Linear From 50°C	0.4	mA/°C	
Reverse Voltage	5	V	
Operating Temperature Range	-40°C to +80°C		
Storage Temperature Range			
Lead Soldering Temperature [4mm (0.157 inch) from body]	260°C for 5 Seconds		


Electrical/Optical Characteristics at $T_a = 25$ °C


Parameter	Symbol	Minimum	Typical	Maximum	Unit	Test
Luminous Intensity	lv	-	9.8	-	mcd	I _f = 20mA
Peak Emission Wavelength	λP	-	635	-	nm	Measurement at Peak
Dominant Wavelength	λD	-	625	-		I _f = 20mA-
Operating Voltage	V _{dd}	3	5	10	V	-
Blinking Frequency	F _{blk}	2	2.4	2.8	Hz	-
Reverse Current	l _R	-	-	100	μA	V _R = 5V

LED Orange, 5mm





Orange (GaAsP/CaP λ P = 635nm)

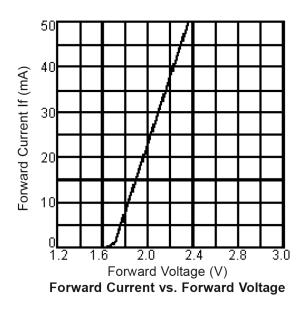

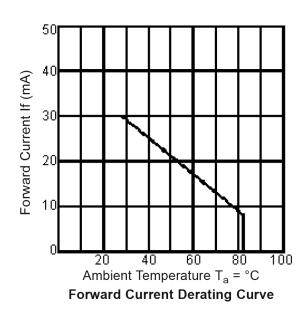

Orange (GaAsP/CaP λ P = 635nm)

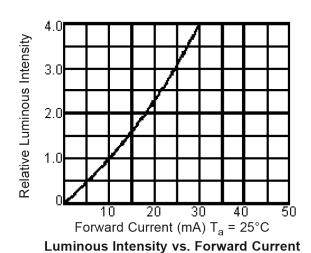


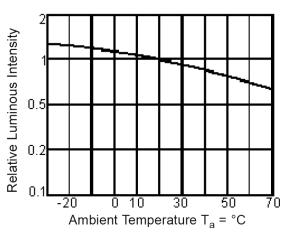

Luminous Intensity vs. Ambient Temperature

LED Orange, 5mm



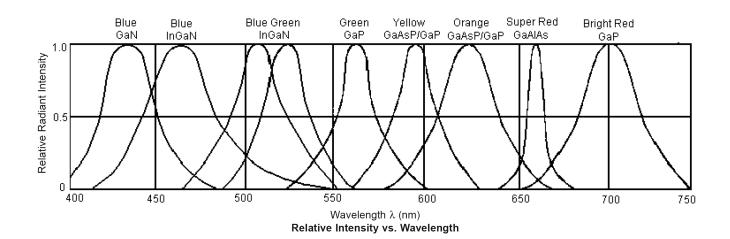

1.5 (0.06) Maximum

Anode

1.0 (0.04) Minimum

1.0 (0.04)

26.4 (1.04) Minimum

8.6 (0.339)

Dimensions: Millimetres (Inches)

Part Number Table

Description	Part Number		
LED, Flashing, 5mm, Orange	MCLF056AD		

Important Notice: This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com www.farnell.com www.newark.com

