

## Specification Status: Released

**Electrical Rating**

Voltage: 72 V max (AC or DC)  
Current: 40 A max (AC or DC)

**Insulating Material:**

Cured, Flame Retardant Epoxy Polymer  
meets UL94 V-0 Requirements


**Lead Material:**

20 AWG Tin Plated Copper

**Marking:**

— Manufacturer's Mark  
XX X250 and Part Identification

□□□□ — Lot Identification

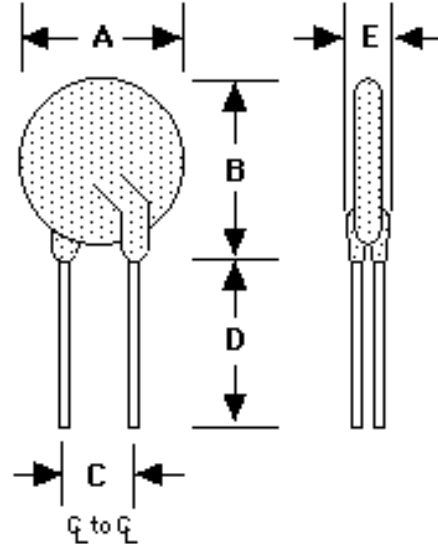

**TABLE I. DIMENSIONS:**

	A		B		C		D		E	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	--	20.8	--	25.4	9.4	10.9	7.6	--	--	3.0
in*:	--	(0.82)	--	(1.00)	(0.37)	(0.43)	(0.30)	--	--	(0.12)

\*Rounded off approximation

**TABLE II. PERFORMANCE RATINGS :**

I HOLD RATED CURRENT	CURRENT RATINGS		INITIAL RESISTANCE VALUES		TIME TO TRIP	ONE HOUR POST-TRIP RESISTANCE STANDARD TRIP	TRIPPED- STATE POWER DISSIPATION	
	AMPERES AT 20°C HOLD	AMPERES AT 20°C HOLD   TRIP	OHMS AT 20°C MIN   MAX				SECONDS AT 20°C, 12.5A MAX	OHMS AT 20°C MAX
2.50	2.50	5.00	0.05	0.08	15.6	0.13	2.5	3.38

Agency Recognitions

UL, CSA, TUV, CQC

Reference Documents:

PS300

Precedence:

This specification takes precedence over documents referenced herein.

Effectivity:

Reference documents shall be the issue in effect on the date of invitation for bid.

CAUTION:

Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

**Materials Information**

**ROHS Compliant**

**ELV Compliant**

**Pb-Free**

**Halogen Free\***

Directive 2002/95/EC  
Compliant

Directive 2000/53/EC  
Compliant



\* Halogen Free refers to: Br≤900ppm, Cl≤900ppm, Br+Cl≤1500ppm.