




LOC B	DIST —	REVISIONS						
		P	LTR	DESCRIPTION	DATE	DWN	APVD	
			AA1	COLOR CODE DETAILS ADDED	06FEB2014	TJ	JK	

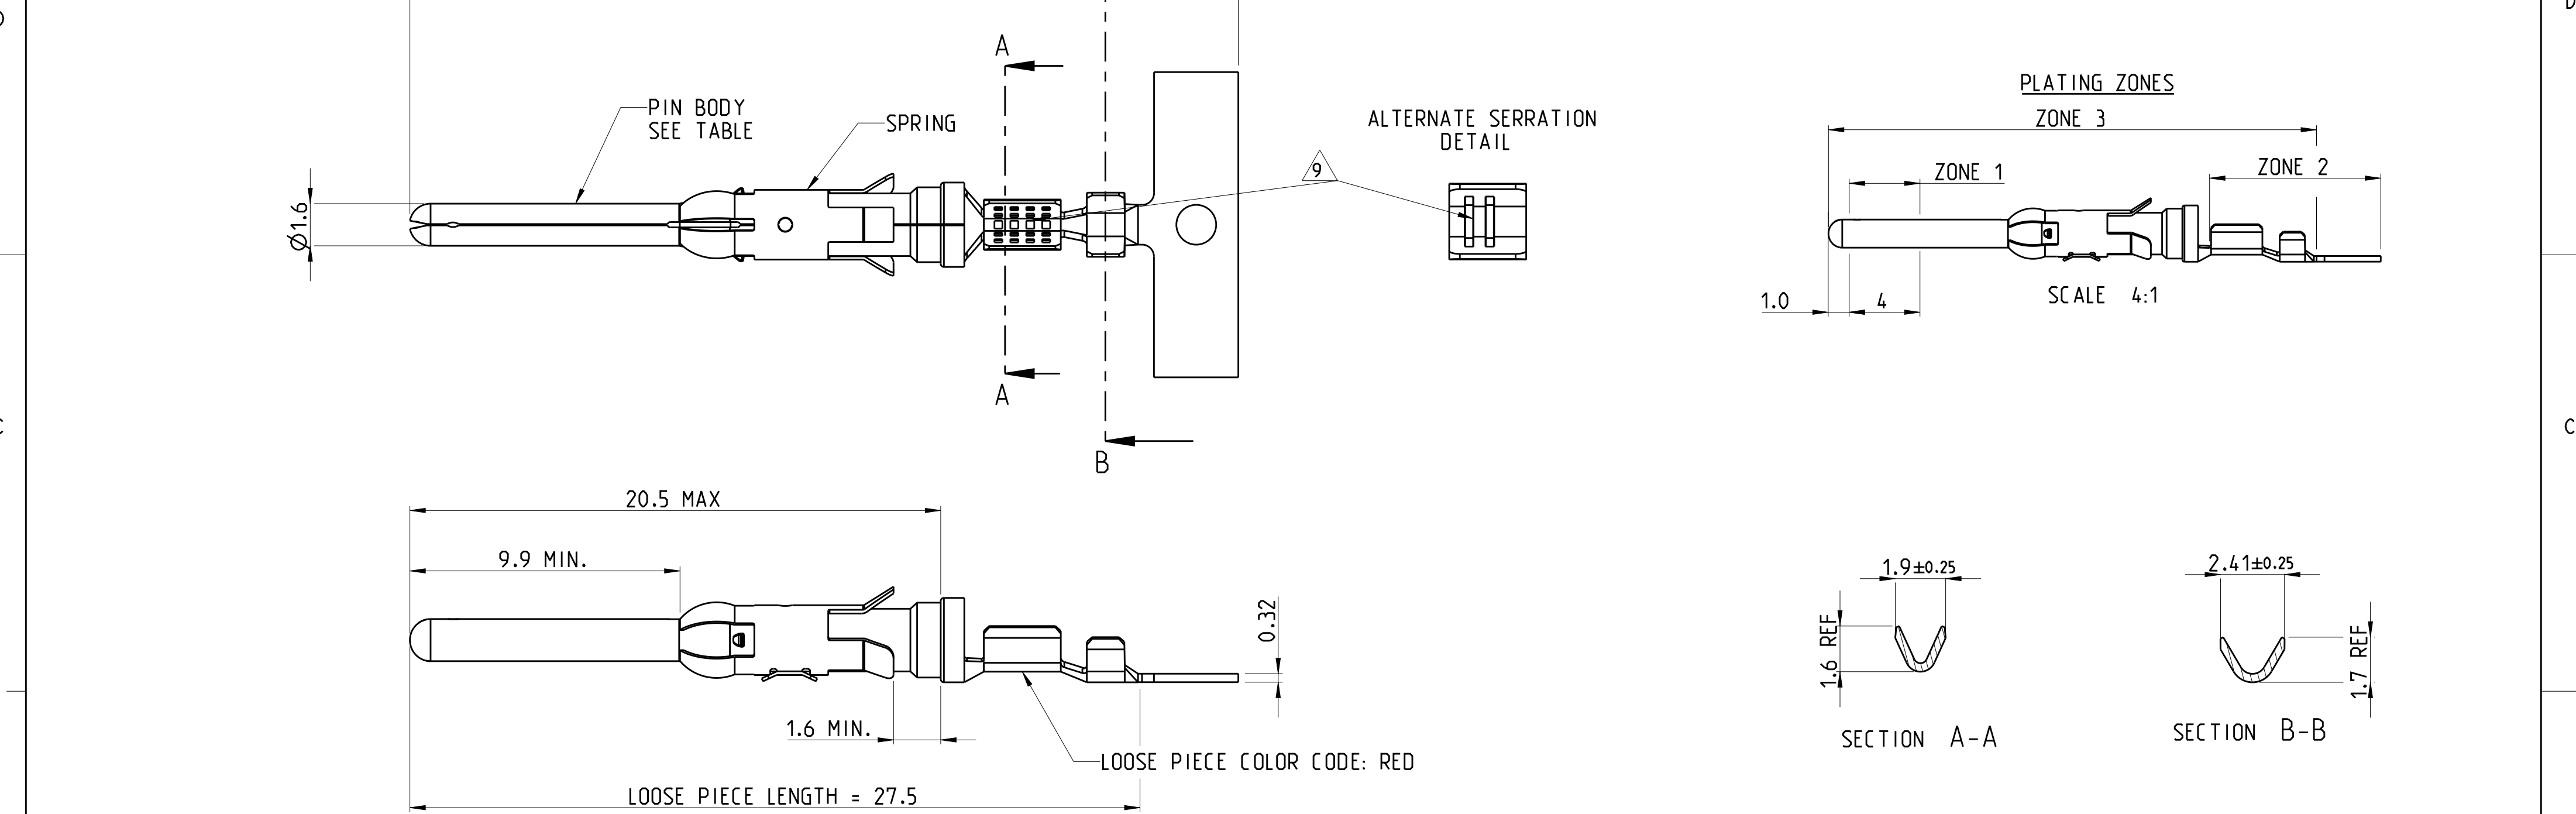

- NOTES
- 1.27 MICRON MIN NICKEL PLATE OVER ZONE 3.
0.76 MICRON MIN PRECIOUS METAL PLATE OVER ZONE 1.
1 MICRON MIN TIN PLATE OVER ZONE 2.
(CONFORMS TO THE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPEC 108-10042
BASED ON EIA/ECA-364-1000.01A (CONTROLLED ENVIRONMENT APPLICATIONS)
 - 1.27 MICRON MIN NICKEL PLATE OVER ZONE 3.
0.76 MICRON MIN PRECIOUS METAL PLATE OVER ZONE 1.
0.076 MICRON MIN GOLD FLASH PLATE OVER THE REMAINDER OF ZONE 3.
(CONFORMS TO THE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPEC 108-10042
BASED ON EIA/ECA-364-1000.01A (CONTROLLED ENVIRONMENT APPLICATIONS)
 - 1.54 - 2.54 MICRON SILVER PLATE OVER ZONE 3.
 - 1.27 MICRONS MIN NICKEL PLATE OVER ZONE 3.
0.76 MICRON MIN GOLD PLATE OVER ZONE 1.
0.076 MICRON MIN GOLDFLASH PLATE OVER THE REMAINDER OF ZONE 3.
 - 1.27 MICRONS MIN NICKEL PLATE OVER ZONE 3.
0.76 MICRONS MIN GOLD PLATE OVER ZONE 1.
1 MICRON MIN TIN PLATE OVER ZONE 2.
 - HOT-DIPPED PRETIN
 - 1.27 MICRON MIN NICKEL PLATE OVER ZONE 3.
1 - 3 MICRONS ELECTRO-TIN PLATE OVER ZONE 3
 - 0.76 MICRONS MIN NICKEL PLATE OVER ZONE 3 PER QQ-N-290
1.5 - 2.54 MICRONS SILVER PLATE OVER ZONE 3.
 - SERRATIONS CAN BE MULTILOCK OR TWO SLOTS
 10. WIRE RANGE: 0.12-0.20 mm² (26-24 AWG)
 11. INSULATION RANGE: 0.9-1.4 mm (.035-.055) DIA
 - LUBRICATE

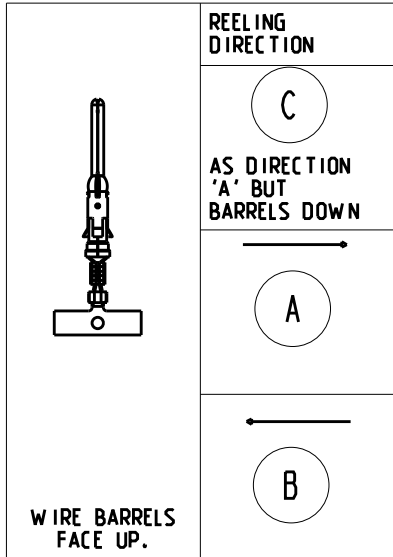

		A	12 7	STAINLESS STEEL	BRASS		1-163089-3
		A	1	STAINLESS STEEL	BRASS		1-163089-1
		B	1	STAINLESS STEEL	BRASS	1-163090-0	1-163089-0
		A	7	STAINLESS STEEL	BRASS	163090-1	163089-9
		A	2	STAINLESS STEEL	BRASS	163090-2	163089-8
		B	7	STAINLESS STEEL	BRASS		163089-1
		REELING	FINISH	SPRING MATERIAL	PIN BODY	LOOSE PIECE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.BRIGHT	26/03/12	TE Connectivity			
		CHK M.GREENER	26/03/12				
		APVD D.PENNINGTON	26/03/12				
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME MULTIMATE CONTACTS - PIN ASS'Y TYPE III, SIZE 16 26-24 AWG, 0.9-1.4mm DIA INSULATION			
		0 PLC ±0.5 1 PLC ±0.25 2 PLC ±0.15 3 PLC ±0.15 4 PLC ± ANGLES ±2°		PRODUCT SPEC 108-10042			
				APPLICATION SPEC 114-10004			
				SIZE A2			
MATERIAL		FINISH		CAGE CODE 00779		DRAWING NO C=163089	
SEE TABLE		SEE TABLE		CUSTOMER DRAWING		RESTRICTED TO -	
				SCALE NTS		SHEET 1 OF 1	
						REV AA1	